

ABOUT US

- > Started in 1982
- ➤ Largest Crawler Carrier Fleet
- ➤ Nationwide Sales & Rentals
- > 70+ Custom Applications/Sizes
- Extensive Parts Inventory





Table of Contents

Pg. 2 - About Us	
Pg. 3 - Contact Us	
Prinoth Panther T16's	
Pg. 5 - T16 Dump Box	
Pg. 6 - T16 Flat Bed	
Pg. 7 - T16 Concrete Mixer	
Pg. 8 - T16 Fuel Tanker	
Prinoth Panther T14R's	
Pg. 9 - T14R Rotating Dumper	
Pg. 10 - T14R Rotating Flat Bed	
Prinoth Panther T12's	
Pg. 11 - T12 Dump Box	
Pg. 12 - T12 Fifth Wheel Hitch	
Pg. 13 - T12 Solar Unit	
Pg. 14 - T12 Welding Rig	
Pg. 15 - T12 Hydro Seeder	
Pg. 16 - T12 Crane Unit	
Pg. 17 - T12 Water tanker	

Pg. 18 - T12 Flat Bed	
Pg. 19 - T12 Straw Blower	
Pg. 20 - T12 Hydro Vac	
Pg. 21 - T12 Pole Hauler	
Prinoth Panther T8's	
Pg. 22 - T8 Concrete Mixer	
Pg. 23 - T8 Dump Box	
Pg. 24 - T8 Fuel Tanker	
Pg. 25 - T8 Flat Bed	
Pg. 26 - T8 Welding Rig	
Pg. 27 - T8 Hydro Vac	
Pg. 28 - T8 Hydro Seeder	
Pg. 29 - T8 Lime Spreader	
Pg. 30 - T8 Straw Blower	
Pg. 31 - T8 Bucket Truck	
Pg. 32 - T8 Digger Derrick	
Pg. 33 - T8 Hook Lift	
Pg. 34 - T8 Personnel Carrier	

Pg. 35 - T8 Sand Blaster Prinoth Panther T7R's Pg. 36 - T7R Rotating Dumper Prinoth Panther T6's Pg. 37 - T6 Dumper Pg. 38 - T6 Flat Bed Pg. 39 - T6 Personnel Carrier Fat Trucks Pg. 40 - Fat Truck 2.8C Pg. 41 - Fat Truck 2.8P Yanmar Dumpers Pg. 42 - C50R Swivel Dumper Pg. 43 - C50R Flat Bed Pg. 44 - C30R Swivel Dumper Other Pg. 45 - Tracked Trailers Pg. 46 - Custom Applications

Pg. 47 - Replacement Parts

Panther T16 Dump Box

■ Length: 26′9″

■ Width: 9'9"

■ Height: 10′

Ground Clearance: 20"

■ Fording Depth: 51"

■ Weight: 40,558 lbs.

Payload: 33,500 lbs.

• Engine: 275 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 8 mph

■ Ground Pressure Empty: 3.71 psi

■ Ground Pressure Loaded: 6.87 psi

■ Dump Body Width: 102"

Dump Body Length: 177"



Panther T16 Flatbed

■ Length: 29'8"

■ Width: 9'9"

■ Height: 10′

• Ground Clearance: 20"

■ Fording Depth: 51"

• Weight: 40,558 lbs.

■ Payload: 33,500 lbs.

• Engine: 275 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

Max Speed: 8 mph

■ Ground Pressure Empty: 3.71 psi

■ Ground Pressure Loaded: 6.87 psi

■ Fuel Tank Capacity: 86 gal.

■ Flatbed Length: 17′

■ Flatbed Width: 9'7"





Panther T16 Concrete Mixer

Length: 30'6"

■ Width: 9'9"

Height: 11'8"

■ Ground Clearance: 20"

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

Max Speed: 8 mph

• Weight: 43,640 lbs.

■ Drum Capacity: 9 yd³

■ Discharge Opening: 42"

Water Tank Capacity: 150 gal.

• Engine: 275 hp CAT C7.1

■ Fuel Tank Capacity: 86 gal.



Panther T16 Fuel Tanker

■ Length: 29′6″

■ Width: 9'9"

■ Height: 10′

■ Ground Clearance: 20"

■ Fording Depth: 51"

■ Weight: 40,558 lbs.

■ Diesel Fuel Tank Capacity: 2,000 gal.

■ DEF Fuel Tank Capacity: 100 gal.

• Engine: 275 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

Max Speed: 8 mph

■ Ground Pressure Empty: 3.71 psi

■ Ground Pressure Loaded: 6.87 psi

Machine Fuel Tank Capacity: 86 gal.



Panther T14R Rotating Dumper

Length: 19'5"

■ Width: 8'6"

Height: 10'7"

Ground Clearance: 20"

Fording Depth: 47.2"

• Weight: 36,663 lbs.

Payload: 29,100 lbs.

Dump Box Capacity (Struck): 6.6 yd³

Dump Box Capacity (Heaped): 9.5 yd³

• Engine: 275 hp CAT C7.1

■ Max Speed: 8.1 mph

■ Ground Pressure Empty: 3.97 psi

Ground Pressure Loaded: 7.46 psi

Fuel Tank Capacity: 74 gal.





Panther T14R Rotating Flat Bed

Length: 19'5"

■ Width: 8'6"

Height: 10'7"

Ground Clearance: 20"

Fording Depth: 47.2"

• Weight: 36,663 lbs.

■ Payload: 29,100 lbs.

• Engine: 275 hp CAT C7.1

Uphill/Sidehill Grade: 15°

■ Max Speed: 8.1 mph

■ Ground Pressure Empty: 3.97 psi

■ Ground Pressure Loaded: 7.46 psi

■ Flat Bed Length: 121"

Panther T12 Dump Box

Length: 20'

■ Width: 8′5″

■ Height: 9′5″

Ground Clearance: 21"

• Weight: 27,500 lbs.

Payload: 25,000 lbs.

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 8.4 mph

Ground Pressure Empty: 3.50 psi

Ground Pressure Loaded: 6.20 psi

■ Dump Body Width: 89"

■ Dump Body Length: 143"



Panther T12 Fifth Wheel Hitch

■ Length: 19′ 3″

■ Width: 8′5″

■ Height: 9′5″

• Ground Clearance: 21"

Weight: 27,500 lbs.

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

■ Max Speed: 8.4 mph

■ Ground Pressure Empty: 3.50 psi

■ Ground Pressure Loaded: 6.20 psi

■ JOST 3-point locking system

■ Maximum Horizontal Rating: 150,000 lbs.





Panther T12 Solar Unit

■ Length: 20′

■ Width: 8′5″

■ Height: 9′5″

• Ground Clearance: 21"

■ Weight: 27,500 lbs.

■ Payload: 25,000 lbs.

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

■ Max Speed: 8.4 mph

■ Ground Pressure Empty: 3.50 psi

■ Ground Pressure Loaded: 6.20 psi

■ Fuel Tank Capacity: 65 gal.





Panther T12 Welding Rig

Length: 31′5″

Width: 10'5"

Height: 12'3"

• Ground Clearance: 21"

• Payload: 29,100 lbs.

• Engine: 250 hp CAT C7.1

Uphill/Sidehill Grade: 15°

Max Speed: 8.1 mph

Ground Pressure Empty: 3.97 psi

Ground Pressure Loaded: 7.46 psi

Welding Rig: Vanguard CPW 125-4

Generator Module: 170 hp 6-cylinder engine

Welders Available: 4 Welders

Crane Capacity: 12,000 lbs.

Crane Rating: 85,000 ft-lb

Crane Length: 30'

Panther T12 Hydro Seeder

■ Length: 19′3″

■ Width: 8′5″

■ Height: 10′

■ Ground Clearance: 21"

• Weight: 27,500 lbs.

■ Payload: 25,000 lbs.

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

• Sidehill Grade: 21.8°

Max Speed: 6.2 mph

■ Ground Pressure Empty: 2.94 psi

■ Ground Pressure Loaded: 5.91 psi


■ Discharge Distance: 200+ feet

Tank Capacity: 1,500 gallons

Integrated shredder system for faster loading

Three agitators for faster mixing



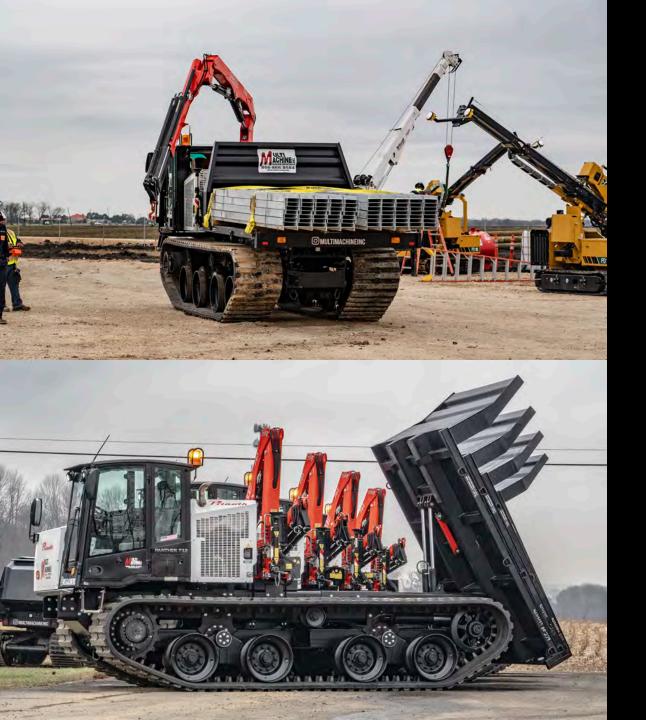

Panther T12 Crane Unit

Length: 22'6"

■ Width: 9'6"

■ Height: 9′5″

• Ground Clearance: 21"

• Weight: 32,300 lbs.

Max Crane Capacity: 6,200 lbs.

Max Crane Reach: 40'

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

Max Speed: 8 mph

■ Ground Pressure Empty: 2.94 psi

Ground Pressure Loaded: 5.91 psi

Machine Fuel Tank Capacity: 65 gal.



Panther T12 Water Tanker

Length: 19'3"

■ Width: 8'5"

■ Height: 9′5″

■ Ground Clearance: 21"

Weight: 27,500 lbs.

Water Tank: Liquid Master® T-Series

Water Tank Capacity: 2500 gal.

• Engine: 250 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

■ Max Speed: 8.4 mph

Ground Pressure Empty: 2.94 psi

Ground Pressure Loaded: 5.91 psi

Fuel Tank Capacity: 65 gal.

Panther T12 Flat Bed

■ Length: 22′7″

■ Width: 8′5″

■ Height: 9′5″

Ground Clearance: 21"

Weight: 27,500 lbs.

■ Payload: 25,000 lbs.

Engine: 250 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 8.4 mph

Ground Pressure Empty: 3.50 psi

Ground Pressure Loaded: 6.20 psi

Fuel Tank Capacity: 65 gal.

■ Flatbed Length: 14′5″

■ Flatbed Width: 8'4"





Panther T12 Straw Blower

Length: 19'3"

• Width: 8'5"

Height: 9'11"

Ground Clearance: 21"

Weight: 32,200 lbs.

Engine: 250 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 6.2 mph

Ground Pressure Empty: 2.94 psi

Ground Pressure Loaded: 5.91 psi

■ Fuel Tank Capacity: 65 gal.

Straw Blower: Finn B70

Discharge Speed: 7 tons per hour

Discharge Distance: 60 ft.

Beater Chamber: 3.5 ft³

Panther T12 Hydrovac

■ Length: 25′3″

■ Width: 8'6"

■ Height: 11'8"

• Ground Clearance: 21"

■ Weight: 33,700 lbs.

Max Speed: 6.2 mph

■ Vac Tank Capacity: 850 gal.

■ Water Tank Capacities: 250 gal.

Suction Hose: 6"

■ Extendable Boom: 14′

Uphill Grade: 31°

Sidehill Grade: 21.8°

• Fuel Tank Capacity: 65 gal.







Panther T12 Pipe Hauler

Length: 24'5"

■ Width: 8′5″

■ Height: 9′5″

Ground Clearance: 21"

■ Weight: 27,500 lbs.

■ Payload: 25,000 lbs.

• Engine: 250 hp CAT C7.1

■ Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 8.4 mph

■ Ground Pressure Empty: 3.50 psi

Ground Pressure Loaded: 6.20 psi

Fuel Tank Capacity: 65 gal.

Panther T8 Concrete Mixer

Length: 20'6"

■ Width: 8'

■ Height: 9'8"

• Ground Clearance: 17"

Weight: 25,680 lbs.

Drum Capacity: 3.5 yds

Discharge Opening: 24"

Water Tank Capacity: 80 gal.

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

• Fuel Tank Capacity: 65 gal.



Panther T8 Dump Box

• Length: 18'7"

■ Width: 8'

■ Height: 8′7″′

• Ground Clearance: 17"

• Weight: 19,000 lbs.

Payload: 16,000 lbs.

Engine: 225 hp CAT C7.1

Uphill Grade: 31°

• Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

■ Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi

• Fuel Tank Capacity: 65 gal.

Dump Body Width: 89"

■ Dump Body Length: 125"



Panther T8 Fuel Tanker

Length: 18′5″

Width: 8'

■ Height: 8′7″

Ground Clearance: 17"

■ Weight: 25,000 lbs.

Diesel Fuel Tank Capacity: 1,000 gal.

DEF Fuel Tank Capacity: 100 gal.

■ Engine: 225 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 7.15 mph

Ground Pressure Empty: 2.22 psi

Ground Pressure Loaded: 4.10 psi

Machine Fuel Tank Capacity: 65 gal.







Panther T8 Flat Bed

■ Length: 18′5″

■ Width: 8'

■ Height: 8'7"'

■ Ground Clearance: 17"

■ Weight: 19,000 lbs.

■ Payload: 16,000 lbs.

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

• Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

■ Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi

■ Fuel Tank Capacity: 65 gal.

■ Flatbed Length: 10′5″

■ Flatbed Width: 7'5"



Panther T8 Welding Rig

Length: 27'

■ Width: 9'10"

■ Height: 8'7"'

• Ground Clearance: 17"

• Weight: 31,313 lbs.

Payload: 16,000 lbs.

• Engine: 225 hp CAT C7.1

Fuel Tank Capacity: 65 Gallons

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

Welding Rig: Vanguard CPW 125-4

Welders Available: 4 Welders

Panther T8 Hydrovac

■ Length: 23′3″

■ Width: 8'

■ Height: 9'8"

■ Ground Clearance: 17"

• Weight: 27,920 lbs.

Vac Tank Capacity: 550 gal.

■ Suction Hose: 4"

■ Water Tank Capacities: 100 gal.

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

■ Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi







Panther T8 Hydro Seeder

Length: 24'2"

Width: 8'

• Height: 11'1"

Ground Clearance: 17"

Weight: 26,580 lbs.

Hydro Seeder: Finn T120

Tank Capacity: 1,000 gal.

Discharge Distance: 180 ft.

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 7.15 mph

Ground Pressure Empty: 2.22 psi

Ground Pressure Loaded: 4.10 psi

Fuel Tank Capacity: 65 gal.



Panther T8 Lime Spreader

Length: 24'2"

■ Width: 8'

Height: 11'1"

■ Ground Clearance: 17"

Weight: 23,376 lbs.

■ Tank Capacity: 165 ft³

■ Engine: 225 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 6.15 mph

Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi

Fuel Tank Capacity: 65 gal.



Panther T8 Bucket Truck

Length: 18'7"

■ Width: 8'

■ Height: 8'7"'

Ground Clearance: 17"

• Weight: 19,000 lbs.

■ Payload: 16,000 lbs.

■ Engine: 225 hp CAT C7.1

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 7.15 mph

Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi

Fuel Tank Capacity: 65 gal.

■ Working Height: 49.5′





Panther T8 Digger Derrick

Length: 26′4″

■ Width: 8'

Height: 10′3″′

Ground Clearance: 17"

Payload: 16,000 lbs.

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

Max Speed: 7.15 mph

Ground Pressure Empty: 2.22 psi

• Ground Pressure Loaded: 4.10 psi

Max Sheave Height: 46'5"

Max Lift Capacity: 25,085 lbs.

Max Horizontal Reach: 37' 4"

Boom Articulation: -20 to 80°

Fuel Tank Capacity: 65 gal.



Panther T8 Hook Lift

- Length 18'7.5"
- Width 8'
- Height 8′7″
- Ground Clearance: 17"
- Weight: 19,000 lbs.
- Payload: 16,000 lbs.
- Engine: 225 hp CAT C7.1
- Max Speed: 7.15 mph
- Uphill Grade: 31°
- Sidehill Grade: 21.8°
- Ground Pressure Empty: 2.22 psi
- Ground Pressure Loaded: 4.10 psi
- Fuel Tank Capacity: 65 gal.

Panther T8 Personnel Carrier

■ Length: 23′1″

■ Width: 8'2"

■ Height: 9'9"

• Ground Clearance: 17"

■ Weight: 27,080 lbs.

Capacity: 24 People

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

■ Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

■ Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi

■ Fuel Tank Capacity: 65 gal.



Panther T8 Sand Blaster

■ Length: 18′7″

■ Width: 8'

■ Height: 8'7"

• Ground Clearance: 17"

Weight: 25,000 lbs.

■ Sand Blaster: Marco Blast Master 3.5

■ Sand Blaster Capacity: 3.5 ft

■ Air Compressor: Sullivan Palatek D185

■ Air Compressor CFM: 185 @ 100 psi

• Engine: 225 hp CAT C7.1

Uphill Grade: 31°

• Sidehill Grade: 21.8°

■ Max Speed: 7.15 mph

■ Ground Pressure Empty: 2.22 psi

■ Ground Pressure Loaded: 4.10 psi









Panther T7R Rotating Dumper

Length: 17′3″

■ Width: 8'2"

■ Height: 9′1″

Ground Clearance: 15"

■ Fording Depth: 37"

• Weight: 23,259 lbs.

■ Payload: 15,500 lbs.

■ Engine: 201 hp CAT C4.4

Uphill/Sidehill Grade: 15°

Max Speed: 8.1 mph

Ground Pressure Empty: 3.00 psi

■ Ground Pressure Loaded: 4.99 psi

Fuel Tank Capacity: 53 gal.



Panther T6 Dump Box

Length: 16′1″

Width: 8'

Height: 8'7"

Ground Clearance: 17"

■ Weight: 15,400 lbs.

Payload: 12,600 lbs.

■ Engine: 147 hp CAT C4.4

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 9.3 mph

■ Ground Pressure Empty: 2.70 psi

Ground Pressure Loaded: 4.60 psi

■ Dump Body Width: 89"

Dump Body Length: 96"

Panther T6 Flatbed

Length: 15'11"

■ Width: 8'2"

■ Height: 8′7″′

Ground Clearance: 17"

• Weight: 15,400 lbs.

• Payload: 12,600 lbs.

■ Engine: 147 hp CAT C4.4

Uphill Grade: 31°

• Sidehill Grade: 21.8°

Max Speed: 9.3 mph

■ Ground Pressure Empty: 2.19 psi

Ground Pressure Loaded: 4.60 psi

Flatbed Length: 8'

■ Flatbed Width: 7'5"



Panther T6 Personnel Carrier

■ Length: 18′11″

■ Width: 8'

■ Height: 9′9″

• Ground Clearance: 17"

• Weight: 19,960 lbs.

Capacity: 12 People

■ Engine: 147 hp CAT C4.4

Uphill Grade: 31°

Sidehill Grade: 21.8°

Max Speed: 9.3 mph

Ground Pressure Empty: 2.19 psi

Ground Pressure Loaded: 4.60 psi

■ Fuel Tank Capacity: 46.2 gal.



Fat Truck 2.8C

■ Length: 12′2″

■ Width: 8'4"

■ Height: 9'3"

• Ground Clearance: 20"

■ Weight: 5,400 lbs.

■ Payload: 2,200 lbs.

■ Engine: 67 hp CAT C2.2

Turning Radius: 0°

■ Max Speed Land: 25 mph

Max Speed Water: 2 mph

■ Uphill Grade: 35°

Sidehill Grade: 22°





Fat Truck 2.8P

■ Length: 12′2″

■ Width: 8'4"

■ Height: 9'3"

• Ground Clearance: 20"

■ Weight: 4,900 lbs.

Payload: 2,200 lbs.

■ Engine: 67 hp CAT C2.2

■ Max Speed Land: 25 mph

Max Speed Water: 2 mph

Uphill Grade: 35°

Sidehill Grade: 22°





Yanmar C50R Dumper

■ Length: 15′3.5″

■ Width: 7′2.5″

■ Height: 8′11″

• Ground Clearance: 17"

■ Weight: 13,360 lbs.

■ Payload: 8,377 lbs.

■ Ground Pressure Empty: 3.6 psi

■ Ground Pressure Loaded: 5.7 psi

■ Max Speed: 5.9 mph

■ Horsepower: 111.5 hp

■ Dump Body Length: 103.5"

■ Dump Body Width: 74.5"

Yanmar C50R Flatbed

■ Length: 14′11″

■ Width: 6′7″

■ Height: 8′9″

• Ground Clearance: 17"

■ Weight: 11,662 lbs.

■ Payload: 8,379 lbs.

■ Ground Pressure Empty: 2.43 psi

■ Ground Pressure Loaded: 4.31 psi

■ Max Speed: 6.2 mph

■ Horsepower: 96.5 hp

■ Fuel Tank Capacity: 25 gal.







Tracked Trailers

We have multiple trailers available, which can extend up to 75' long and enable you to tow through any environment







Custom Applications

With experience in all different fields of service from mechanical, machining, welding and fabricating of parts and machines since 1982, we are prepared to take on any custom jobs that come up. We understand that with all the different types of challenges our customers face, custom applications often prove to be the most efficient and productive way to get the job done. We have a well-equipped metal shop in house, along with our fleet of service trucks set up to tackle any welding and fabricating on site. The team is always ready to put in the work to customize a machine in a timely matter to keep you on track.

Replacement Parts

Keeping your equipment running at its maximum potential, and reducing downtime is of the utmost importance. With our large stock of parts, you can ensure we will get you the exact part that fits your machine, when and where you need it. We are certified dealers for Prinoth, Fat Truck, Yanmar and CAT ISD.

FINDER FAT TRUCK YANMAR

